



Manage this device with Digi Remote Manager

ANYWHEREUSB PLUS

Connect USB peripheral devices anywhere on a Local Area Network (LAN) without a locally-attached host computer

IoT business automation requires communication with various IT assets and peripherals located across an enterprise. AnywhereUSB® Plus remote USB hubs give users the simplest and most direct connection options for existing equipment with a variety of USB 3.1 Gen 1 port options. All three models have Gigabit Ethernet support for failover redundancy and network bonding with SFP+ ports in the 8 and 24-port models for higher speeds or fiber networks.

AnywhereUSB 24 Plus is rack mountable with 24 USB 3.1 Gen 1 ports, while AnywhereUSB 8 Plus and AnywhereUSB 2 Plus are desktop or panel mountable units with eight or two ports, respectively, and support for Gigabit Ethernet.

AnywhereUSB can be coupled with **Digi Remote Manager®**, a web-based device configuration and security management platform, to help users reduce downtime. An intuitive user experience makes installation smooth and easy; with quick setup and configuration to monitor and maintain larger installations of remote Digi and third-party devices.

For enterprise and industrial customers who need remote or local USB ports and the higher speeds of USB 3.1 Gen 1 and Gigabit/10 Gigabit Ethernet, Digi AnywhereUSB Plus products give you an industry-leading connectivity solution.


FEATURES AND BENEFITS

- Network-attached USB hubs easily connect USB peripheral devices to a PC from remote or virtual hosts
- Ideal for connecting USB devices over the network in virtualized environments such as VMware®
- AnywhereUSB 24 Plus is rack mountable with two power supplies and Ethernet connections for failover redundancy
- Access and monitor USB and serial devices over TCP/IP connection
- Supports multi-host connectivity for each USB port or group independently
- Supports **Digi Remote Manager** cloud-based management platform to deploy, monitor and manage devices

RELATED PRODUCTS



APPLICATION EXAMPLE

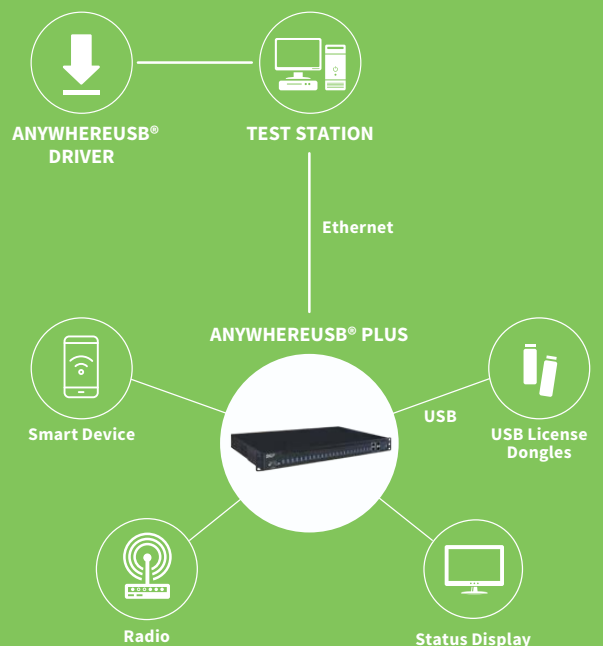

SPECIFICATIONS

ANYWHEREUSB® 2 PLUS

ANYWHEREUSB® 8 PLUS

ANYWHEREUSB® 24 PLUS

CELLULAR

MODULE SUPPORT	-	(1) Digi CORE® modem compliant socket	(1) Digi CORE® modem compliant socket
-----------------------	---	---------------------------------------	---------------------------------------

SOFTWARE AND MANAGEMENT

REMOTE MANAGEMENT	Digi Remote Manager® (cloud based)		
--------------------------	------------------------------------	--	--

LOCAL MANAGEMENT	WebUI (HTTP/HTTPS); CLI (SSH)	WebUI (HTTP/HTTPS); CLI (Console, SSH)	WebUI (HTTP/HTTPS); CLI (Console, SSH)
-------------------------	-------------------------------	--	--

OPERATING SYSTEMS	Windows® 7, 8.1 and 10; Windows Server® 2012 R2, 2016 and 2019		
--------------------------	--	--	--

PROTOCOLS	Supports multi-host connectivity for each USB port or group independently		
------------------	---	--	--

MEMORY	512 MB RAM, 4 GB flash (eMMC)	2 GB RAM, 4 GB flash (eMMC)	2 GB RAM, 4 GB flash (eMMC)
---------------	-------------------------------	-----------------------------	-----------------------------

NETWORK

ETHERNET	(1) RJ-45; 10/100/1000 Mbps	(1) RJ-45; 10M/100M/1G/10G	(2) RJ-45; 10M/100M/1G/10G
-----------------	-----------------------------	----------------------------	----------------------------

SFP+	-	(1) SFP+ socket	(2) SFP+ sockets
-------------	---	-----------------	------------------

CONNECTORS

CONSOLE	-	(1) DB09M; RS-232 DTE	
----------------	---	-----------------------	--

USB	(2) USB 3.1 Gen 1 Type A	(8) USB 3.1 Gen 1 Type A	(24) USB 3.1 Gen 1 Type A
------------	--------------------------	--------------------------	---------------------------

USB PORT POWER	1.8 A per port (simultaneous)	1 A per port (simultaneous)	1 A per port (simultaneous)
-----------------------	-------------------------------	-----------------------------	-----------------------------

PHYSICAL

DIMENSIONS (L X W X H)	118 mm x 74 mm x 30 mm (4.6 in x 2.9 in x 1.2 in)	260mm x 160 mm x 44.45 mm (10 in x 6 in x 1.75 in)	450.85 mm x 255 mm x 44.45 mm (17.75 in x 10 in x 1.75 in)
-------------------------------	---	--	--

WEIGHT	0.38 kg (0.84 lb)	1.58 kg (3.48 lb)	4.7 kg (10.36 lb)
---------------	-------------------	-------------------	-------------------

STATUS LEDS	(2) Ethernet, 2 (x1) USB, power	(2) Ethernet, (2) SFP+ 8 (x1)USB, power, fan, user, (3) future Wi-Fi/WWAN	2 (x2) Ethernet, 2 (x2) SFP+, 24 (x1) USB, 2 (x1) PSU, 2 (x1) fan, user, (3) future Wi-Fi/WWAN
--------------------	---------------------------------	--	--

POWER REQUIREMENTS

POWER INPUT	5 V, 5 A max	12 VDC, 12 A max	100-240 V, 3 A max (2 supplies for redundancy)
--------------------	--------------	------------------	--

POWER CONSUMPTION	25 watts max	98.5 watts max	157.7 watts max
--------------------------	--------------	----------------	-----------------

ENVIRONMENTAL

OPERATING TEMPERATURE	0° C to 40° C (32° F to 104° F)	0° C to 55° C (32° F to 131° F)	0° C to 55° C (32° F to 131° F)
------------------------------	---------------------------------	---------------------------------	---------------------------------

RELATIVE HUMIDITY	5% to 95% (non-condensing)	5% to 95% (non-condensing)	5% to 95% (non-condensing)
--------------------------	----------------------------	----------------------------	----------------------------

APPROVALS

SAFETY	UL 60950, CSA 22.2 No. 60950, EN60950, EN62368	UL/EN60950, UL/EN62368 and CSA 22.2	UL 60950, CSA 22.2 No. 60950, EN60950, EN62368
---------------	--	-------------------------------------	--

EMISSIONS/IMMUNITY	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032	CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55032
---------------------------	--	--	--

WARRANTY

PRODUCT WARRANTY	5-year		
-------------------------	--------	--	--

ENTERPRISE SOFTWARE

DESCRIPTION

PROTOCOL SUPPORT	HTTPS, FTP, SFTP, SSL, SMTP, SSH and CLI for web management; remote management via Digi Remote Manager®
-------------------------	---

SECURITY/VPN	TLS 1.2, SSH, HTTPS
---------------------	---------------------

ROUTING/FAILOVER	Ethernet bonding (only for AnywhereUSB® 24 Plus)
-------------------------	--

OTHER PROTOCOLS	DHCP
------------------------	------

