

R17L100-SPM1

17" IP65 Stainless PCAP Chassis Display



KEY FEATURES

- 17", 1280 x 1024
- Chassis
- Support VESA / YOKE mount
- Stainless housing SUS 316 / AISI 316
- Full IP65 waterproof and dustproof
- Optical bonding (optional)



SPECIFICATIONS

| Display | |
|------------------------------|---|
| Resolution | 1280x1024 |
| Contrast Ratio | 1000:1 |
| Display Color | 16.2M Colors |
| Active Area | 337.920x270.336 mm |
| Size | 17 inches |
| Panel Brightness | 350 nits |
| View Angles | 85,85,80,80 |
| Touch / Glass | Projected Capacitive Multi Touch Screen |
| Mechanical | |
| Dimension | 412 x 344 x 61.3 mm |
| Enclosure | Stainless Housing |
| Mounting | VESA Mount Yoke Mount |
| Cooling System | Fanless design |
| Environment | |
| Operating Humidity | 10% to 90% (non-condensing) |
| Storage Temperature | -20~60°C |
| Operating Temperature | 0~45°C |
| IP rating | IP65 |
| Certification | |
| Certification | CE, FCC |
| IO Ports | |
| USB Port | 1 x M12 waterproof connector for touch screen control |
| Video | 1x M12 type connector for VGA input 1x waterproof connector for DVI input (Optional) 1x waterproof connector for HDMI input (Optional) |
| Indicator | 1 x LED Indicator for power 1 x LED Indicator for status |
| Control | |
| Button | 1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button |
| Accessory | |
| Accessory | 100~240V AC to DC Adapter with waterproof connector Power Cord External USB cable with waterproof connector for touchscreen control External VGA cable with waterproof connector |
| Optional Accessory | External HDMI cable with waterproof connector (Optional) External DVI cable with waterproof connector (Optional) |


Waterproof caps
Manual
VESA screws

Power

Power Rating 12V DC (M12 type)

DIMENSIONS UNIT:MM

Winmate R17L100-SPM1

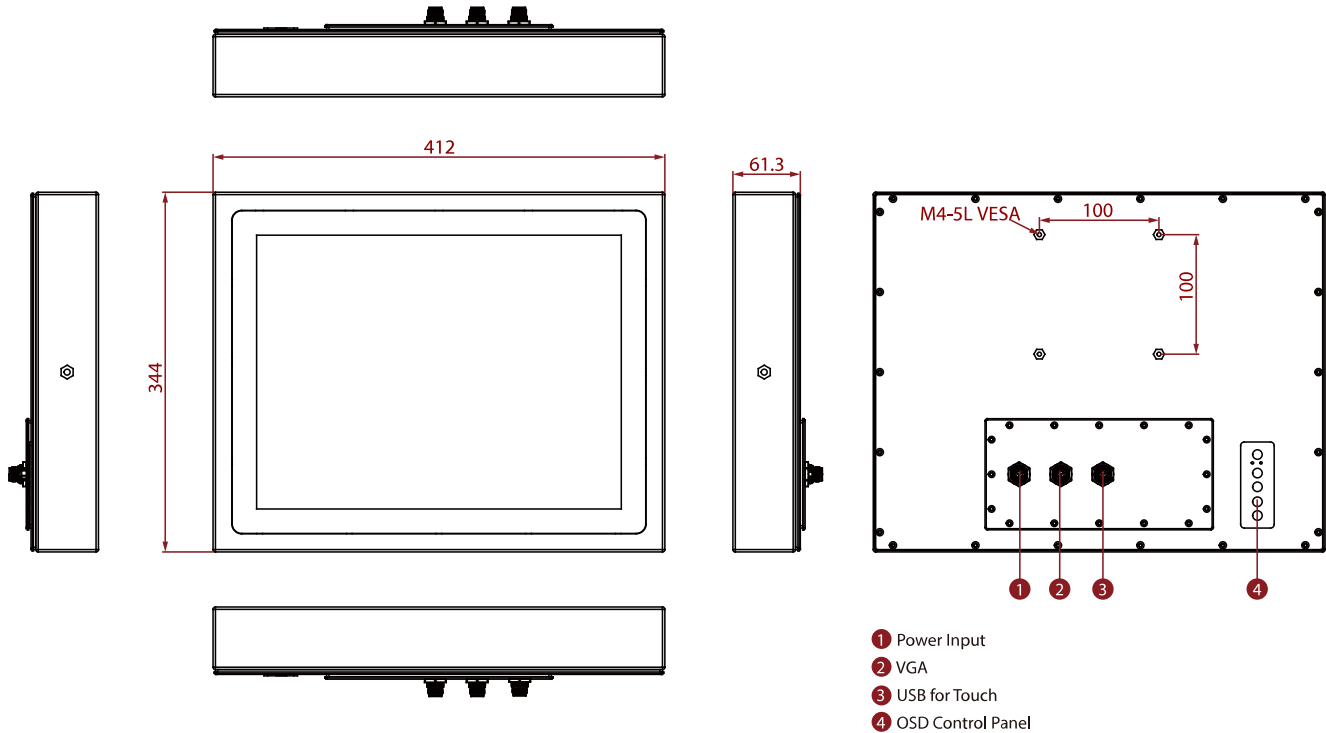

- ① Power Input
- ② VGA
- ③ USB for Touch
- ④ OSD Control Panel